


QUICK DUMP VALVE

- ◆ LARGE DRAINAGE CAPACITY
- ◆ POLYPROPYLENE OR PVDF CONSTRUCTION
- ◆ STANDARD WELDING RING MOUNTING
- ◆ EASY TO SERVICE—SIMPLY UNSCREWS
- ◆ SPRING RETURN OPTIONAL
- ◆ LONG-LIFE, HARD-TAPERED SEAL



SPECIFICATIONS

Size		2"	4"	4" High Flow
Body Diameter –	inches (mm)	3.0 (76)	5.0 (127)	5.0 (127)
Door Diameter –	inches (mm)	2.5 (64)	4.0 (102)	4.0 (102)
Stroke –	inches (mm)	0.65 (17)	0.65 (17)	1.25 (32)
Max Pressure –	inches of H ₂ O (mm of H ₂ O)	25 (635)	25 (635)	25 (635)
Actuator Pressure –	Min/Max PSIG (kPa)	60/70 (414/483)	45/70 (310/483)	45/70 (310/483)
Max Temperature –	Media °F (°C)			
	POLYPROPYLENE	160 (71)	160 (71)	160 (71)
	PVDF	212 (100)	212 (100)	212 (100)
Max Temperature –	Ambient °F (°C)			
	POLYPROPYLENE	160 (71)	160 (71)	160 (71)
	PVDF	212 (100)	212 (100)	212 (100)

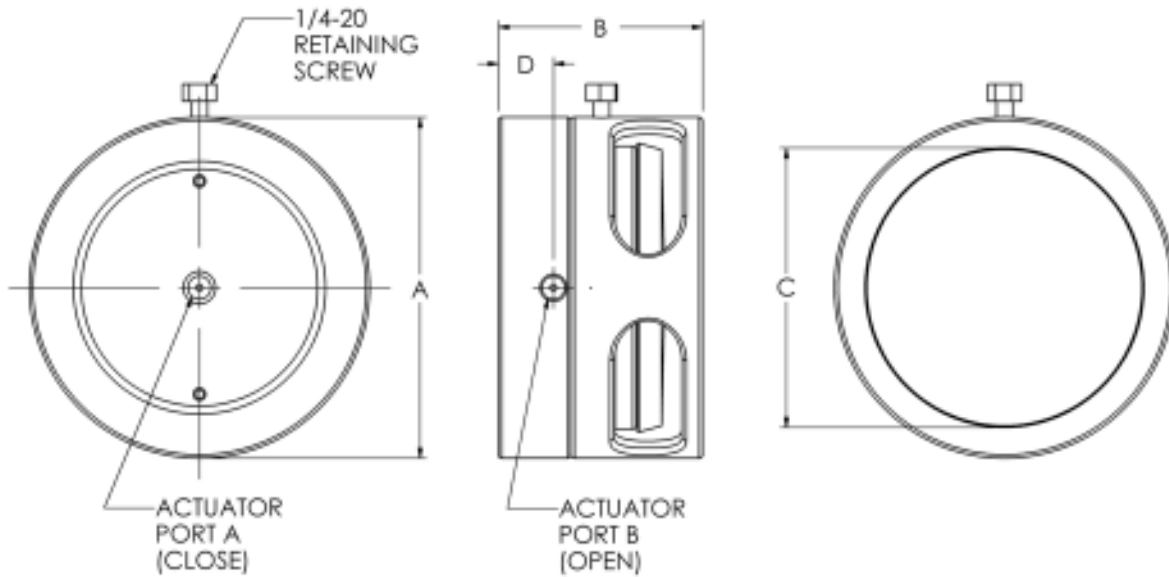

SIZE	A	B	C	D	PORT A	PORT B
2"	3.00	3.00	2.00	0.81	1/8 FNPT	1/8 FNPT
4"	5.00	3.00	4.00	0.81	1/8 FNPT	1/8 FNPT
4" HIGH FLOW	5.00	4.00	4.00	1.50	1/8 FNPT	1/8 FNPT

Specifications subject to change without notice.

All dimensions are in inches.

ORDERING INFORMATION

QDV X X X XXX X XXX

OPTIONS: ### - Non-Standard Options
(Consult Factory)

SEALS:
 V - Viton®
 E - Ethylene Propylene
 K - Kalrez®

MATERIAL: POL - Polypropylene
 PVD - PVDF

CLOSURE: 0 - Air
 1 - Spring

FLOW: 0 - Standard
 1 - High

SIZE: 2 - 2"
 4 - 4"

QUICK DUMP VALVE SERIES

® Viton and Kalrez are registered trademarks of the Dupont Corporation.

LS-DQDV01-01

DYTEC
 CORPORATION

102 Compass Point Dr., Suite D
 St. Charles, MO 63301
 636-949-5600 Fax: 636-724-2492
 www.dytec.com