

### TEFLON® DI SPRAY GUN


- ◆ ONE PIECE VIRGIN PTFE BODY
- ◆ POLYPROPYLENE ACTUATOR
- ◆ VARIOUS INLET THREAD SIZES
- ◆ EXCELLENT FOR ACIDIC OR CORROSIVE ENVIRONMENTS
- ◆ EXCELLENT FOR WET BENCH AND WORK PROCESSING STATION APPLICATIONS
- ◆ COMFORTABLE HANDLE DESIGN



### SPECIFICATIONS

Hose Fitting Size	1/4"	3/8"	1/2"
Flow Rate – GPM (at 40 PSI)	1.5	1.5	1.5
Max Pressure – PSIG (kPa)	75 (517)	75 (517)	75 (517)
Max Temperature – Media °F (°C)	160 (71)	160 (71)	160 (71)

Body	Virgin PTFE	Nozzle	PTFE
Handle	Polypropylene	Actuator Cap	Polypropylene
Actuator	Polypropylene	Spring	302 SS, Teflon® Coated

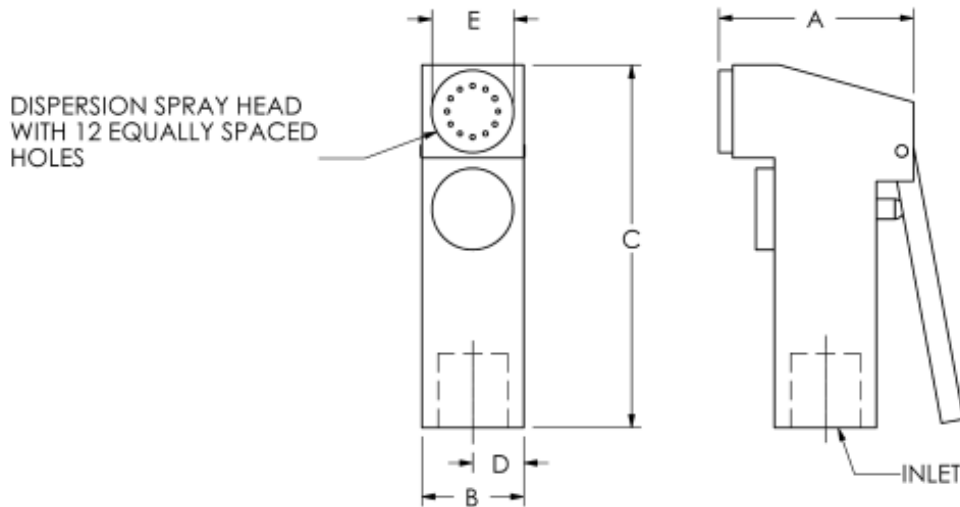

SIZE	A	B	C	D	E	INLET
1/4"	2.10	1.13	3.90	0.55	0.88	1/4 FNPT
3/8"	2.10	1.13	3.90	0.55	0.88	3/8 FNPT
1/2"	2.10	1.13	3.90	0.55	0.88	1/2 FNPT

Specifications subject to change without notice.

All dimensions are in inches.

## ORDERING INFORMATION

**THG DN X P TFE X XXXX**

**OPTIONS:** #### - Non-Standard Options (Consult Factory)

**SEALS:**  
 V - Viton®  
 E - Ethylene Propylene  
 K - Kalrez®

**BODY MATERIAL:** PTFE

**CONNECTION TYPE:** FNPT

**CONNECTION SIZE:**  
 4 - 1/4"  
 6 - 3/8"  
 8 - 1/2"

**DI SPRAY GUN -- NONRECIRCULATING**

**TEFLON® HAND GUN**

® Teflon, Viton and Kalrez are registered trademarks of the Dupont Corporation.

LS-DTDN01-01

**DYTEC**  
 CORPORATION

102 Compass Point Dr., Suite D  
 St. Charles, MO 63301  
 636-949-5600 Fax: 636-724-2492  
 www.dytec.com