

### TEFLON<sup>®</sup> N<sub>2</sub> SPRAY GUN - RIGHT ANGLE

- ◆ ONE PIECE VIRGIN PTFE BODY
- ◆ POLYPROPYLENE ACTUATOR
- ◆ VARIOUS INLET THREAD SIZES
- ◆ EXCELLENT FOR ACIDIC OR CORROSIVE ENVIRONMENTS
- ◆ EXCELLENT FOR WET BENCH AND WORK PROCESSING STATION APPLICATIONS
- ◆ COMFORTABLE HANDLE DESIGN
- ◆ REPLACEABLE FILTER




#### SPECIFICATIONS

Hose Fitting Size	1/4"	3/8"	1/2"
Flow Rate – SCFM (at 60 PSI)	2.0	2.0	2.0
Max Pressure – PSIG (kPa)	90 (621)	90 (621)	90 (621)
Max Temperature – Media °F (°C)	160 (71)	160 (71)	160 (71)

Body	Virgin PTFE	Nozzle	Polypropylene
Handle	Polypropylene	Actuator Cap	Polypropylene
Actuator	Polypropylene	Spring	302 SS, Teflon <sup>®</sup> Coated

FILTER HOUSING  
WITH REPLACEABLE  
CO-POLYMER FILTER  
(PART NUMBER FY01-N201)

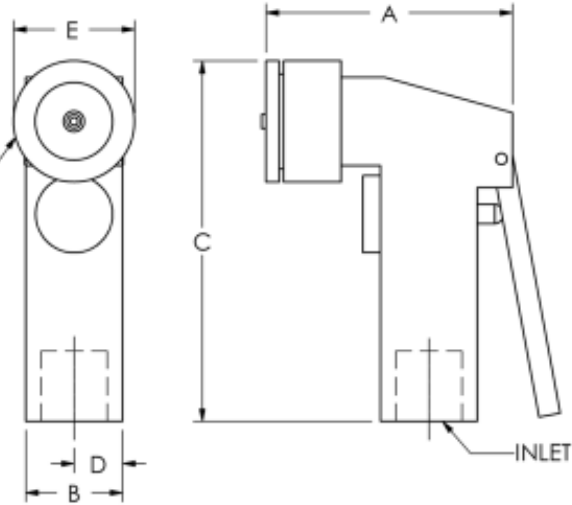

SIZE	A	B	C	D	E	INLET
1/4"	2.80	1.13	4.09	0.55	1.38	1/4 FNPT
3/8"	2.80	1.13	4.09	0.55	1.38	3/8 FNPT
1/2"	2.80	1.13	4.09	0.55	1.38	1/2 FNPT

Specifications subject to change without notice.

All dimensions are in inches.

## ORDERING INFORMATION

THG	NR	X	P	TFE	X	XXXX
-----	----	---	---	-----	---	------

OPTIONS: #### - Non-Standard Options (Consult Factory)

SEALS: V - Viton®  
E - Ethylene Propylene  
K - Kalrez®

BODY MATERIAL: PTFE

CONNECTION TYPE: FNPT

CONNECTION SIZE: 4 - 1/4"  
6 - 3/8"  
8 - 1/2"

NITROGEN SPRAY GUN -- RIGHT ANGLE

TEFLON® HAND GUN

® Teflon, Viton and Kalrez are registered trademarks of the Dupont Corporation.

LS-DTNR01-01

**DYTEC**  
CORPORATION

102 Compass Point Dr., Suite D  
St. Charles, MO 63301  
636-949-5600 Fax: 636-724-2492  
www.dytec.com